


PMB3013

1	谐振频率	Resonant Frequency	kHz	4.0 ± 0.3
2	等效电阻	Resonant Impedance	Ω	≤ 200
3	电 容 量	Capacitance	nF	$30 \pm 30\%$
4	输入电压	Input Voltage	Vp-p	30V
5	工作电流	Rated Current	mA	≥ 100
6	声响分贝	Sound Output at 30cm	dB	105
7	基片材料	Metal Material		黄铜 Brass
8	塑壳材料/颜色	Shell Material/Color		ABS/黑色
9	工作温度	Operating Temperature	$^{\circ}\text{C}$	$-20 \sim +70^{\circ}\text{C}$
10	贮存温度	Store Temperature	$^{\circ}\text{C}$	$-30 \sim +80^{\circ}\text{C}$
11	重量	Weight	(g)	10

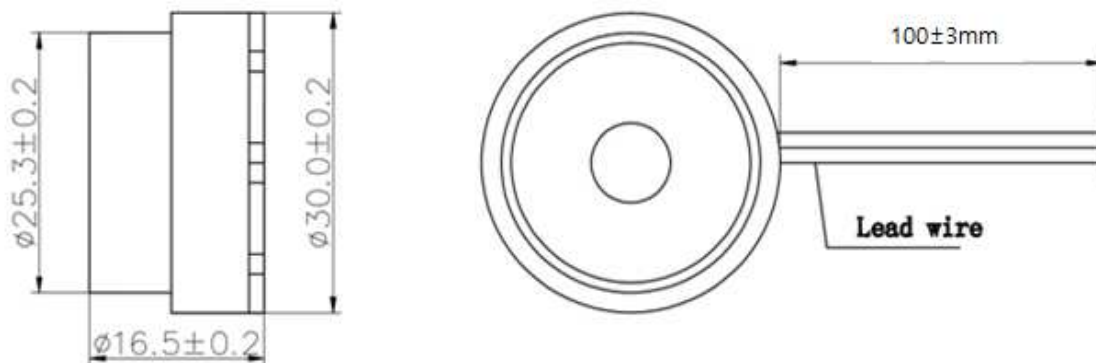

피엠비일렉텍: 서울시 구로구 구로동 1258번지 중앙유통단지 라동 3516호
 Tel: 02-2619-0388(대) Fax: 02-2619-0346
 E-mail: pmbe@pmbe.co.kr Web site: www.pmbe.co.kr