


PMB 1460A

1	Resonant Frequency	4000±500Hz
2	Operating Voltage	1 ~ 20 Vp-p
3	Rated Current	Max.3mA ,at 4KHz 50% duty Square Wave 5Vp-p
4	Sound Output at 10cm	Min. 85dB,at 4KHz 50% duty Square Wave 5Vp-p
5	Capacitance	15000±30%pF at 1KHz
6	Operating Temperature	-30°C ~ +70°C
7	Store Temperature	-40°C ~ +85°C
8	Net Weight	Approx 0.5g
9	ROHS	Yes

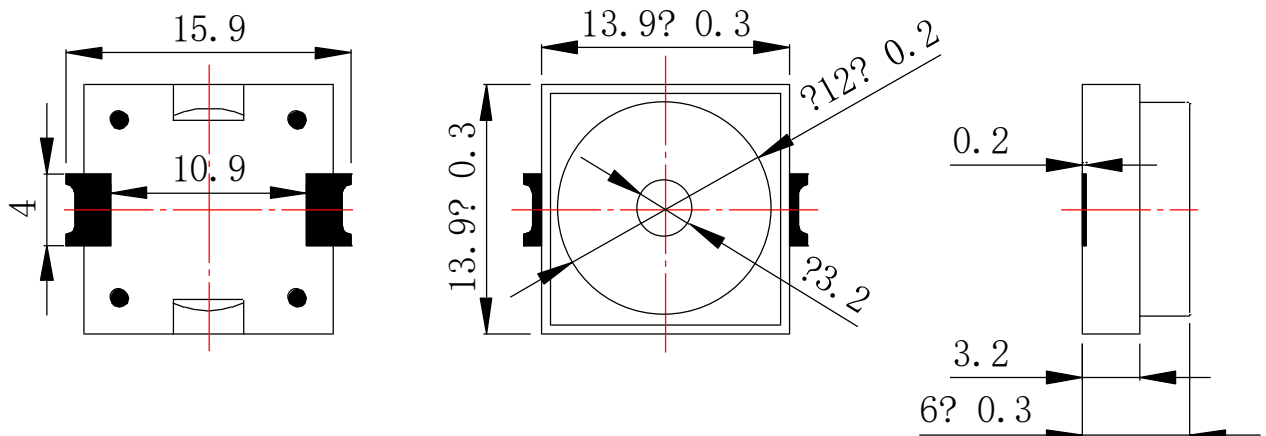

*Unit: mm; Tolerance: ±0.3mm Except Specified

*Housing Material: Black LCP

*Terminal plate: 2 soldering pads, tin Plating Brass

피엠비일렉텍:서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbec.co.kr