

PMB9427RP-5-50


TYPE	UNIT	PMB9427RP-5-50
◆ Min. Sound Output at 10cm	dB	87
Rated Voltage	V _{0-p}	5
Operating Voltage	V _{0-p}	4~6
Resonant Frequency	Hz	2730
◆ Max. Current Consumption	mA	70
Coil Resistance	Ω	40 ± 4
◇ Coil Impedance	Ω	80
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-30 ~ +80
Weight	g	0.8

◆ Value applying at (rated voltage, 2730 Hz, 1/2 duty square wave)


◇ Value applying at (2730 Hz, sine wave, measuring current 60μA)

DIMENSIONS :

(Unit: mm)

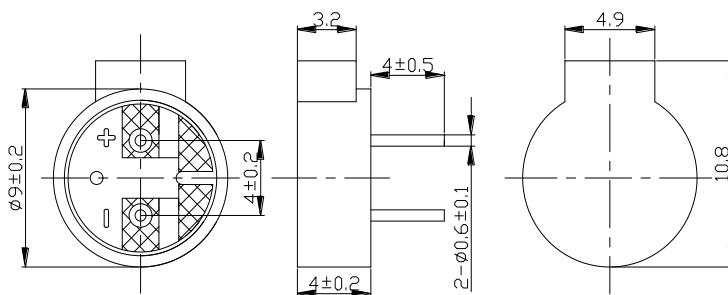

FREQUENCY RESPONSE:

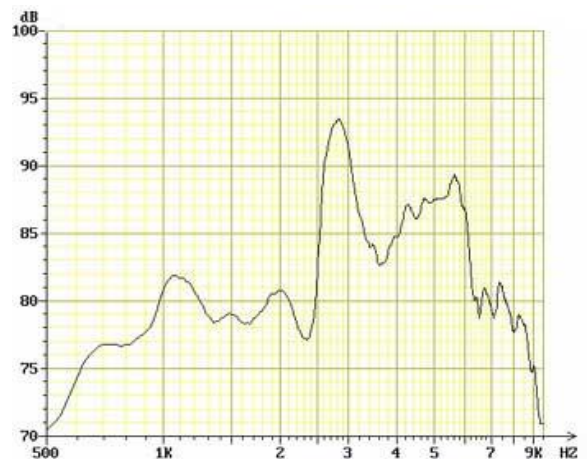

피엠비일렉텍: 서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbe.co.kr