


## PMB30BPW-1.5-6

No.	Item	Unit	Specification	Condition
1	Oscillation Frequency	Hz	3000	Vo-p=1/2duty , square wave
2	Operating Voltage	Vo-p	1 ~2	
3	Rated Voltage	Vo-p	1.5	
4	Current Consumption	mA	MAX.80	at Rated Voltage
5	Sound Pressure Level	dB	MIN. 70 (Typical 77)	at 10cm at Rated Voltage
6	Coil Resistance	$\Omega$	6 $\pm$ 1	
7	Operating Temperature	$^{\circ}$ C	-20 ~ +70	
8	Storage Temperature	$^{\circ}$ C	-30 ~ +80	
9	Dimension	mm	$\Phi$ 6.5 x H3.5	See appearance drawing
10	Weight (MAX)	gram	0.8	
11	Housing Material		PPO( Black )	
12	Leading Pin		Tin Plated Brass(Sn)	See appearance drawing
13	Environmental Protection Regulation		RoHS	

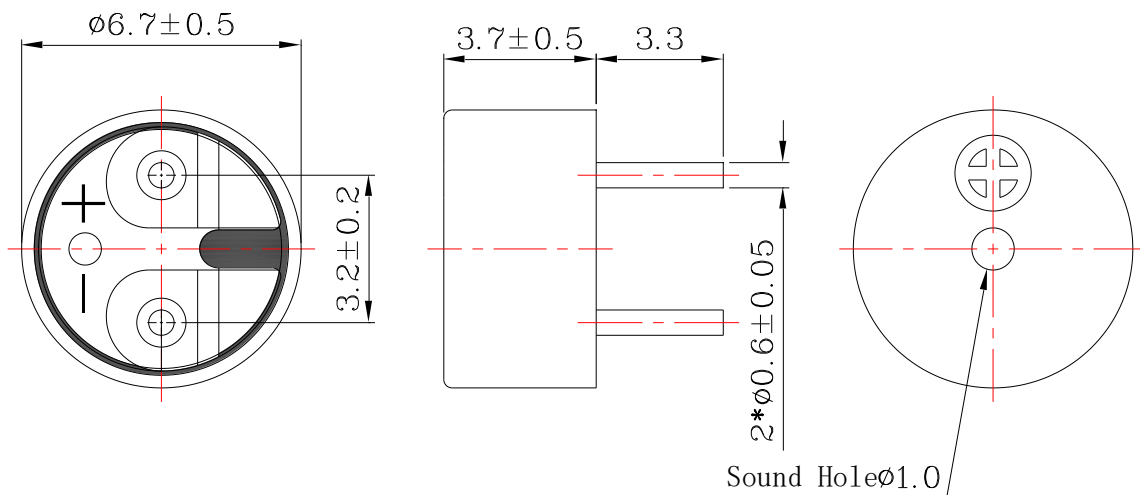

피엠비일렉텍: 서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbe.co.kr