

SPECIFICATION

Model Number: PMB23P

Description :
Vender's Part No. : **PMB23P**

PMB 피 엠 비 일렉텍
PMB ELECTECH
상표등록 <제40-0729433호>

서울시 구로구 경인로53가길 10 대명벨리온 904호

전화 : 02-2619-0388(대) 팩스 : 02-2619-0346

홈페이지 : www.pmbe.co.kr e-mail : pmbe@pmbe.co.kr



PMB ELECTECH.

상표등록 <제40-0729433호>



PMB23P



1.Specifications

编号	项目	规格	测定条件
1.	VOTCE COIL IMP	$8 \pm 15\% \text{ OHM}$	AT 1KHz 2V
2.	RESONANT FREQ.FO	$1500 \pm 20\% \text{ HZ}$	WITHOUT BAFFLE
3	OUTPUT S.P.L	$63 \pm 3\text{Db}$	AT 1K Hz
4	LNPUT POWER	RATEDPOWERINPUT0.1W	MAX.POWERINPU 0.2W
5	FREQ.RESPONSE	FO-6KHz	OUTPUTS.P.L-10Db
6	RATED FREQ.RESP	Hz	
7	OPERATION	NUST BE NORMAL	PROGRAM/SOURCE0. 63V
8	BUZZES&RATTLES	NUST BE NORMAL	SIN0.1W WAVE0.89V
9	LOAD TEST	NUST BE NORMAL	At2MW IEC 268-5whitenoise islest for 96hours
10	HEATTEST	NUST BE NORMAL	70° C $\pm 2^\circ$ C 20-25%RH 4HOURS
11	HUMLDITY TEST	NUST BE NORMAL	40° C $\pm 2^\circ$ C 90-95%RH 4HOURS
12	DISTORTION	5.0%MAX	RATED POWER LNPUT2400Hz
13	TOTAL.FLUX	MAXWELL	
14	FLU.DENSITY	13mwb	
15	NAGNET	$\phi 6.5 \times 1.5 \text{ NdFeB}$	
16	WEIGHT	3.5g	
17.	V.C.STZE	$\phi 7.2 \text{ mm}$	
18.	REMARK		
19	COLD TEST-20° C 4H		
20	CYCLE TEST 10° CH 70° H5CYCLE		
21.	SIZE	$\phi 22.5 \text{ mm}$	针长: 5.5mm

PMB PMB ELECTECH.

상표등록 <제40-0729433호>

PMB23P

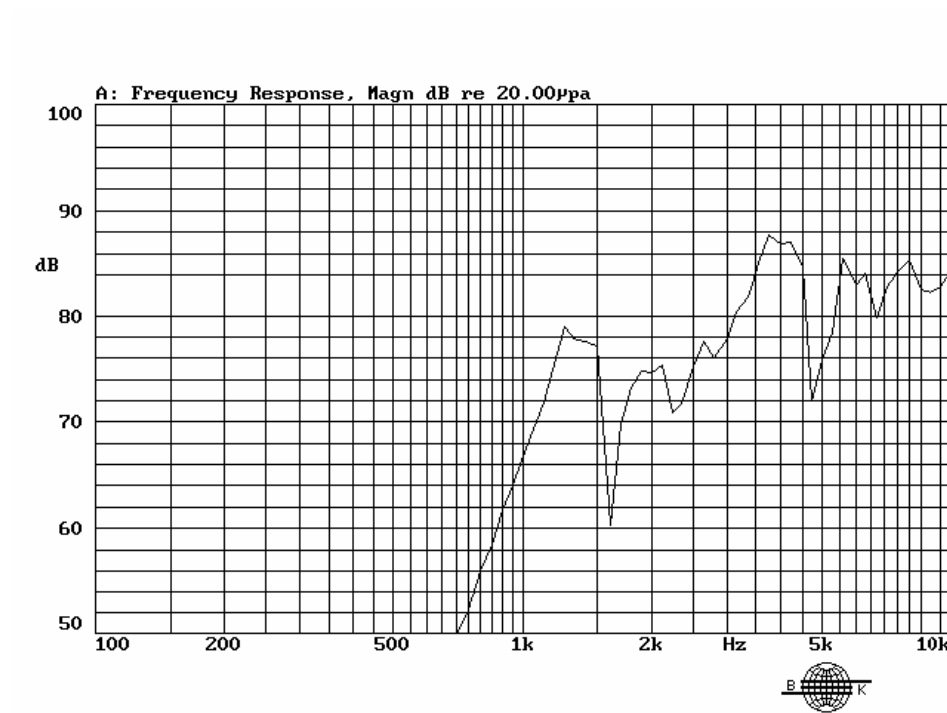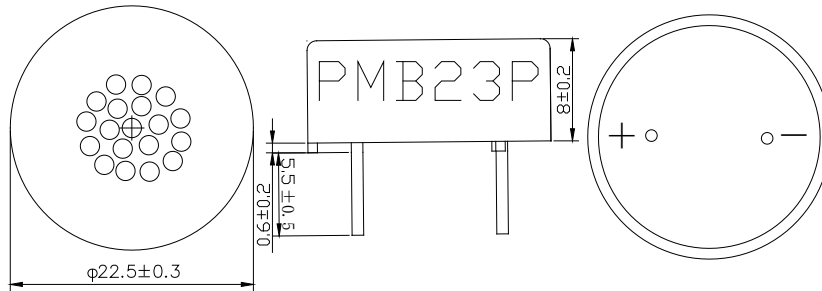

서울시 구로구 구로동 1258 번지 중앙유통단지 나동 3116 호

전화 : 02-2619-0388(대)

팩스 : 02-2619-0346

홈페이지 : www.pmbe.co.kr

e-mail : pmbe@pmbe.co.kr