

ROHS

SPECIFICATION OF PRODUCT

産 品 承 認 書

DESCRIPTION : SPEAKER

P M B P/N: PMB-58126430-R08W10.0-C

PMB

상표등록 <제40-0729433호>

피엠비일렉텍

PMB ELECTECH

서울시 구로구 경인로53가길 10 대명벨리온 904호

TEL : (02)2619-0388 FAX : (02)2619-0346

HOME PAGE : <http://www.pmbe.co.kr> E-MAIL : pmbe@pmbe.co.kr

C O N T E N T S

※ CONDITION.	
.....	1
※ ELECTRICAL AND ACOUSTICAL SPECIFICATION.	
.....	2
※ MEASURING METHOD	
.....	3
※ FREQUENCY RESPONSE	
.....	4
※ ENVIRONMENT TEST	
.....	5
※ DIMENSIONS	
.....	6

Specification for speaker

1. CONDITION.

Test and measurement will be carried out under normal condition of temperature within 5°C to 35°C, relative humidity within 45% to 85% and air pressure of 860 mbar to 1060 mbar.

Should uncertainly arise in data obtained from the above atmosphere, control of temperature at $20^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and relative humidity within 60% and 70%, with air pressure remaining unchanged, to be enforced.

2. ELECTRICAL AND ACOUSTICAL SPECIFICATION.

2-1	Rated Input Power.	10.0W.
2-2	Max Input Power.	12.0W
2-3	Rated Impedance.	$8\Omega \pm 15\%$
2-4	Sound Pressure Level. (S.P.L.)	86dB(1W/0.5m) ± 3 dB at AVE 0.8K 1.0K 1.2K 1.5K Hz
2-5	Resonance Frequency (Fo).	180 \pm 20%Hz
2-6	Frequency Range.	F0~10kHz.
2-7	Distortion	Less than 5% at 1KHz input Rated Power
2-8	Magnet	magnet Φ 45 *22*8mm
2-9	Buzz, Rattle, etc.	Should not be audible at 8.9V sine Wave between Fo to 20KHz
2-10	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.
2-11	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.
2-12	Weight.	g
2-13	Temperature	Operating temperature: -30°C to $+70^{\circ}\text{C}$ Storage temperature: -40°C to $+85^{\circ}\text{C}$

Specification for speaker

3. MEASURING METHOD

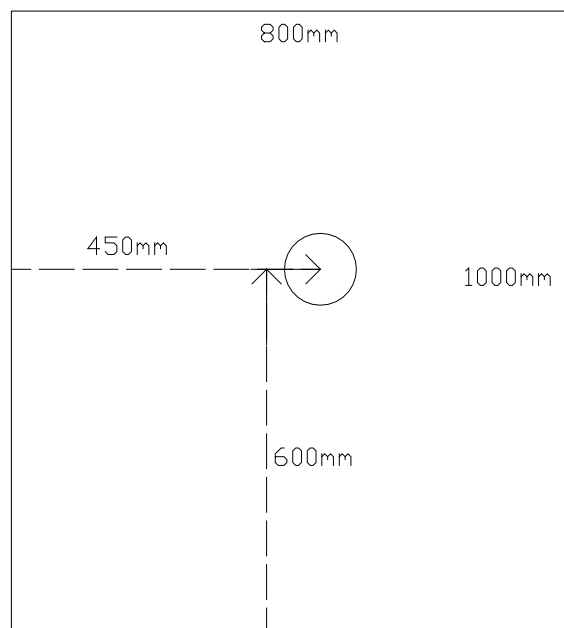


FIG.1

3. 1Block Diagram For Measurement Method.

Standard test condition of speaker

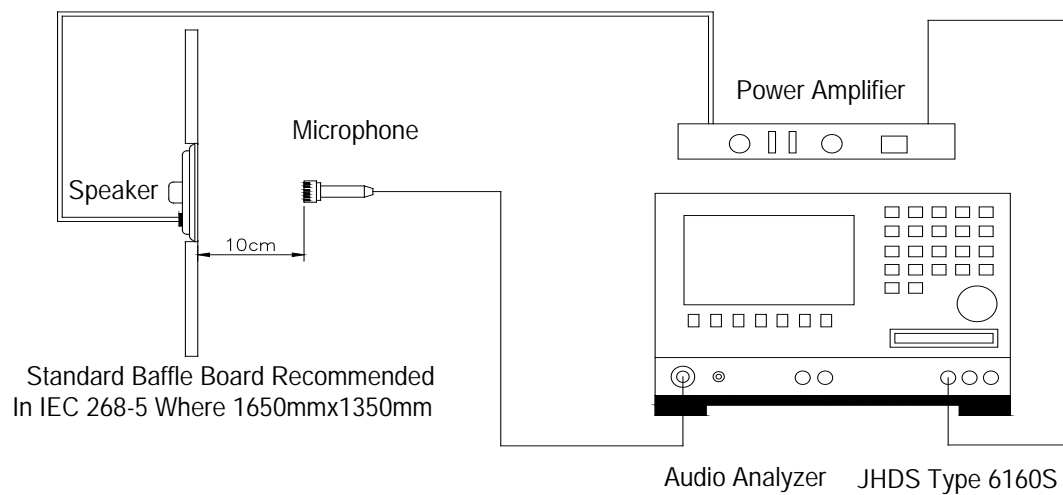


FIG.2

Specification for speaker

4. Frequency Response :

The swept sine-wave frequency response of a Loud speaker should ideally not deviate more than indicated per Fig.3



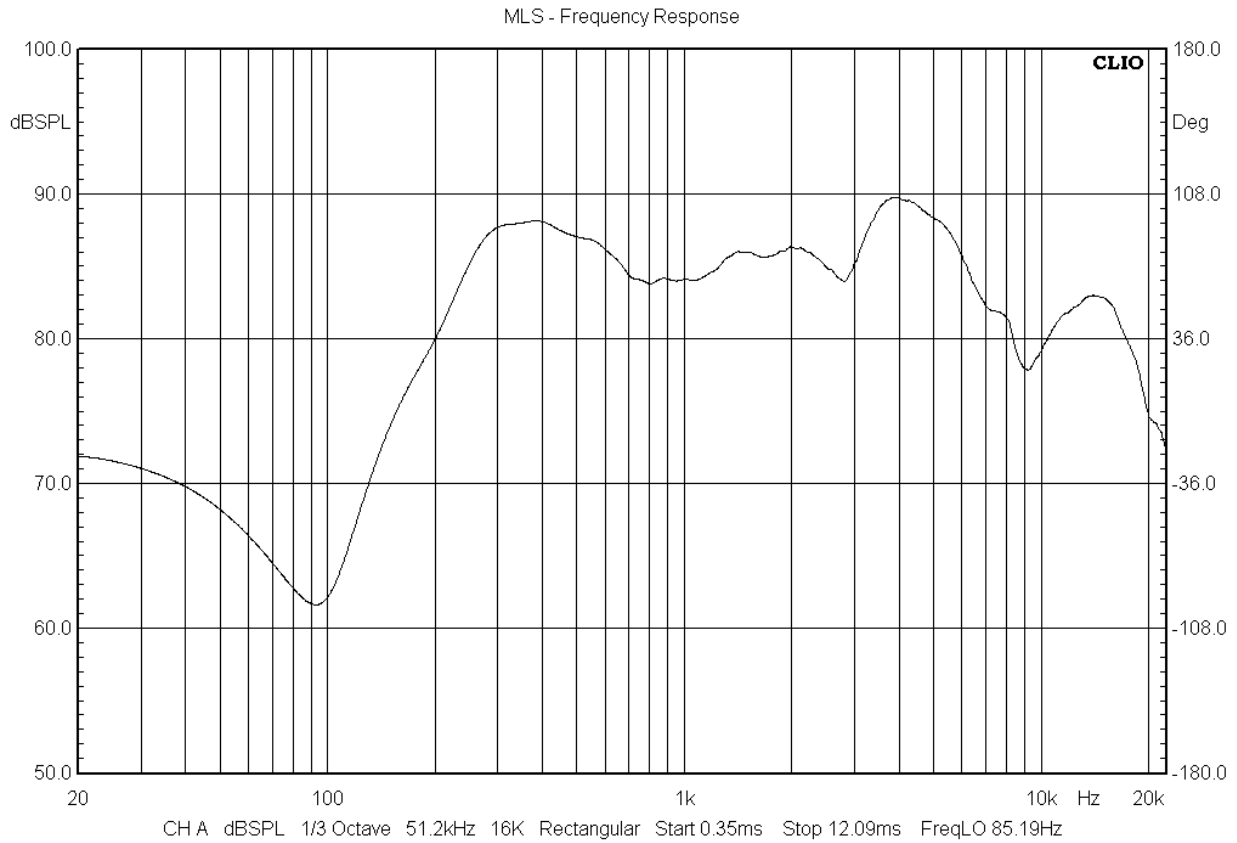


FIG.3

5. ENVIRONMENT TEST

ITEM		SPECIFICATIONS
01	High temp. Test	Keep 96 hours at $+85^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 92-95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	<p>The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of;</p> 
05	Thermal cycle test.	Low temperature: $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$, temperature: $+85^{\circ}\text{C} \pm 3^{\circ}\text{C}$, cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration	10~55~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test	Fix on jig. Then drop from 152cm height to the concrete floor X,y, z 6 direction. 5 times each, total 30 times.
08	Free drop test	Free drop from 100cm height to the concrete floor X,Y, Z 6 direction. 1 times each, total 6 times.
09	Load test	Rated Power White noise is applied for 96 hours
10	Max Power test	Max power 1 min. on - 2 min. off 10 cycles.
11	Terminal strength test	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.
<p>Criterion : After these test , the change of S.P.L shall be within $\pm 3 \text{ dB}$</p>		

6.Dimensions

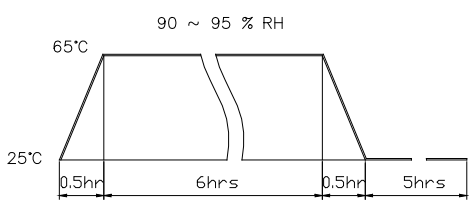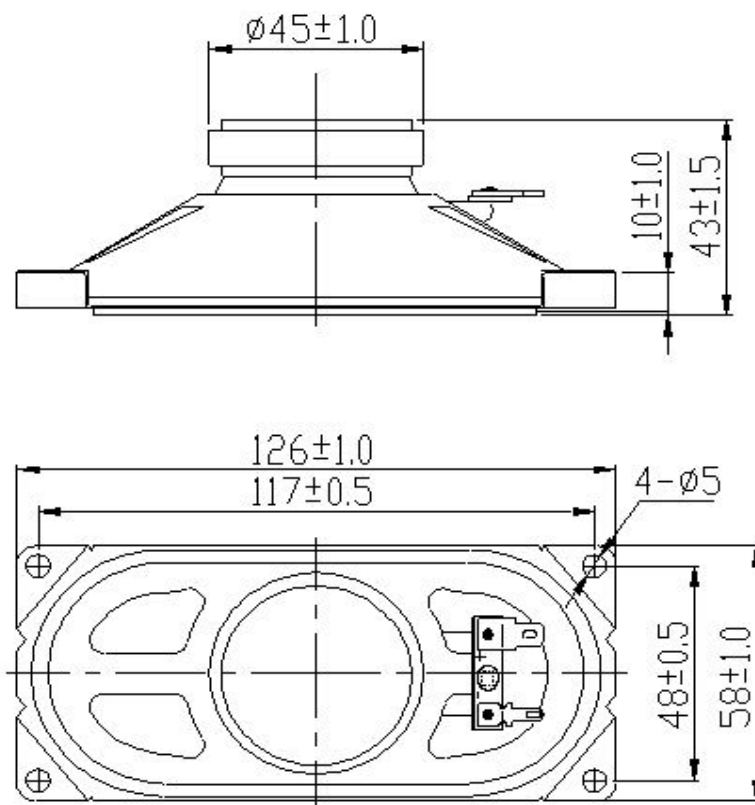

Unit:mm Tol:±0.5

8	GASKET	1	Paper	
7	CAP	1	Paper	
6	Diaphragm	1	Paper	
5	VOICE COIL	1	Paper Cu	
4	Yoke	1	SPCC	
3	Magnet	1	Ferrite	
2	PCB Terminal	1	Paper Cu	
1	Frame	1	SPCC	
The material must be meet to GU-001				
PART NO.	PART NAME	Q'TY	MATERIAL	REMARK