

样品规格书

SPECIFICATION FOR SAMPLE

客户名称

CUSTOMER: _____

环 保 要 求	☐ 无要求 ☐ 只限无铅 ☒ ROHS ☐ SS-00259 ☐ 8P				
产 品 名 称 DESCRIPTION	SPEAKER				
产 品 规 格 SPECIFICATION	INCHS /77*77mm 8Ω 3W / Max 5W				
机 种 编 号 MODEL NO	PMB77F-0235 8Ω 5W				
样 品 编 号 SAMPLE NO					
客 户 料 号 CUSTOMER P/N					
送 样 日 期 OFFER DATE					
御 承 认 栏 APPROVED SIGNATURES BY BUYER					
客 户 承 认 (CUSTOMER APPROVAL)			承 认 (APPROVAL)		
测试 (EDIT)	审核 (AUDITING)	核准 (APPROVE)	设计 (DESIGN)	审核 (AUDITING)	核准 (APPROVE)

PMB 피 엠 비 일 렉 텍
PMB ELECTECH

상표등록 <제40-0729433호>


서울시 구로구 경인로53가길 10 대명벨리온 904호

전화 : 02-2619-0388(대)

팩스 : 02-2619-0346

홈페이지: www.pmbe.co.kr e-mail : pmbe@pmbe.co.kr

特 性 规 格 书 (SPECIFICATIONS)					
机种编号 (MODEL NO.)		PMB77F-0235 8Ω 5W			
(一): 规格 (SPECIFICATION)					
规格尺寸 (SPEC. DIMENSION)		INCHS / mm : 77 mm*77mm			
输入功率 (POWER INPUT)		额定功率 (RATED POWER INPUT): 3W; 最大功率 (MAX POWER INPUT): 5W			
磁铁 (MAGNET)		主磁 (Main) ϕ 45*19*8H Y25 ; 副磁 (Sub) ϕ X H X N35			
重量 (WEIGHT)		g oz			
(二): 电气及机械特性 (ELECTRICAL & MECHANICAL CHARACTERISTICS)					
项 目 (ITEM)		规 格 (SPECIFICATIONS)		检 测 条 件 (TEST CONDITION)	
纯音检查 (OPERATION)		无异常 Without buzz and rattle		Supply the rated sinusoidal power 3W/4.9V at 30 cm from 300 to 2000 Hz	
额定阻抗 (IMPEDANCE)		8Ω ± 15%Ω		At 1000 Hz , 1.0V 20℃	
共振频率 RESONANT FREQ(Fo)		320 Hz ± 20% Hz		供给额定阻抗 0.1W 功率的电压值. Supply the rated impedance 0.1W power voltage	
有效频宽 RATED FREQ RANGE		F0~ 15KHZ ± 0.2 KHz		F0~15 KHz. Average SPL - 10 dB	
输出音压 SOUND PRESSURE LEVEL (SPL)		88± 3 dB (1.0W /1.0m)		At 0.6 , 0.8 , 1.0K, 1.5 KHz average at 1.0 watton axis calculated from 1.0meter/ 2.83 V measurement	
外观检查 APPEARANCE TEST		无划伤、污垢、破裂 Without scratches dirts cracks		Under 40W light at 40 cm	
极性检查 POLARITY TEST		信号输入(+)端子时, 振动板向前振动		MARKING: ■ (+) □ RED The diaphragm shall move forward the magnet	
(三): 可靠性试验 (RELIABILITY TEST)					
项 目 (ITEM)		检 测 条 件 (TEST CONDITION)			
失真率 (DISTORTION)		(1) 1.2Fo < F ≤ 500Hz ≤5 % ; (2) 500Hz < F ≤ 5000Hz ≤3 % (1.0 m 88dB)			
磁束密度 (FLUX DENSITY)		GUASS			
耐寒试验 (COLD TEST)		- 25℃ 16Hrs 试验结束后要满足电气特性 (Shall meet items characteristic after test)			
绝缘抵抗 (INSULATION)		扬声器端子绝缘板以外金属部分之间有 2MΩ 500V 以上. More than 2MΩ 500V between a terminal &a bare metal section of SPK.			
高温试验 (HUMIDTY HEAT TEST)		40℃ 95%RH 96H 试验后放置 1/2 小时, 需要满足外观构造以及电气特性要求. After 1/2H exposure speaker will meet electrical characteristic & not show any Visual or structural degradations			
耐湿性周期性 HUMIDITY CYCLIC TEST		80~96% RH -10℃~65℃ 24 小时为 1 个周期, 共 10 个周期 Followed by 10 cycles of 24 hours			
连续负荷试验 (LOAD TEST)		白噪声在额定功率上试验 96H, 动作须正常。 White noise at nom. power test at least96H, operation must be normal.			
漏磁密度 (FLUX LEAKAGE)		距离后盖 mm 漏磁束 ≤ MT The distance between the tester and the cover of SPK mm			
落下试验 (DROPPING TEST)		75° ± 2° 1.15 m			
设计 (DESIGN)		审核 (AUDITING)		核准 (APPROVE)	

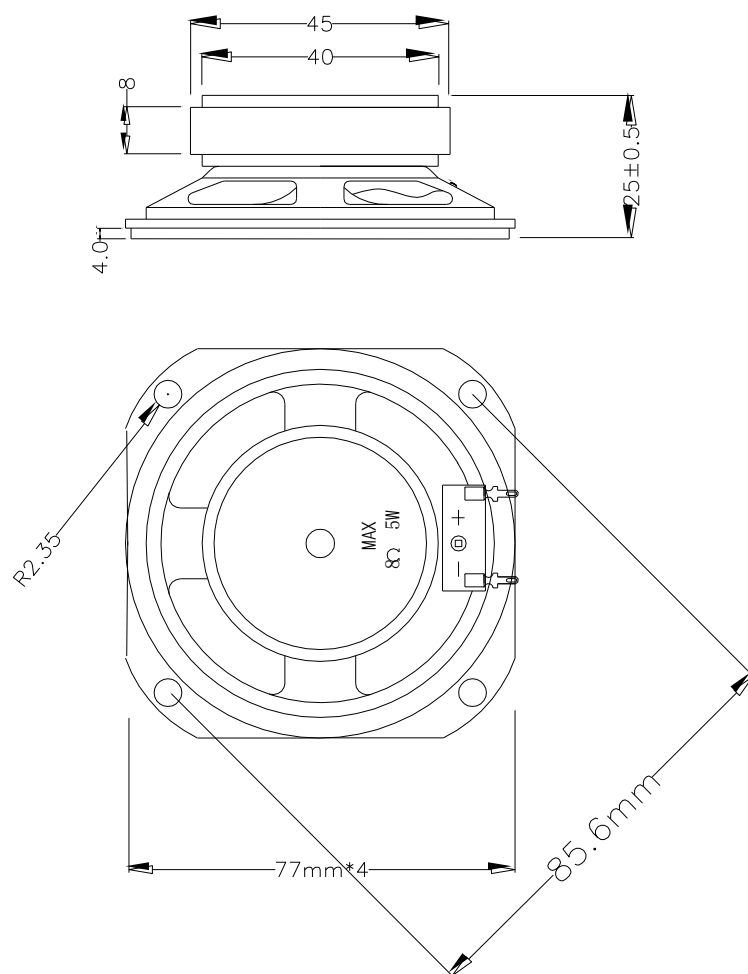


单位 Unit	mm
比例 Scale	
涂复 Finishing	
净重 Net Wt.	g

机种编号 (MODEL NO.): PMB77F-0235 8 Ω 5W	图面名称 (DRAWING NAME): 整机图	备注 (REMARK):
设计 (DESIGN):	审核 (AUDITING):	核准 (APPROVE):


MEASURING CIRCUIT (SPEAKER)

测试回路（喇叭模式）

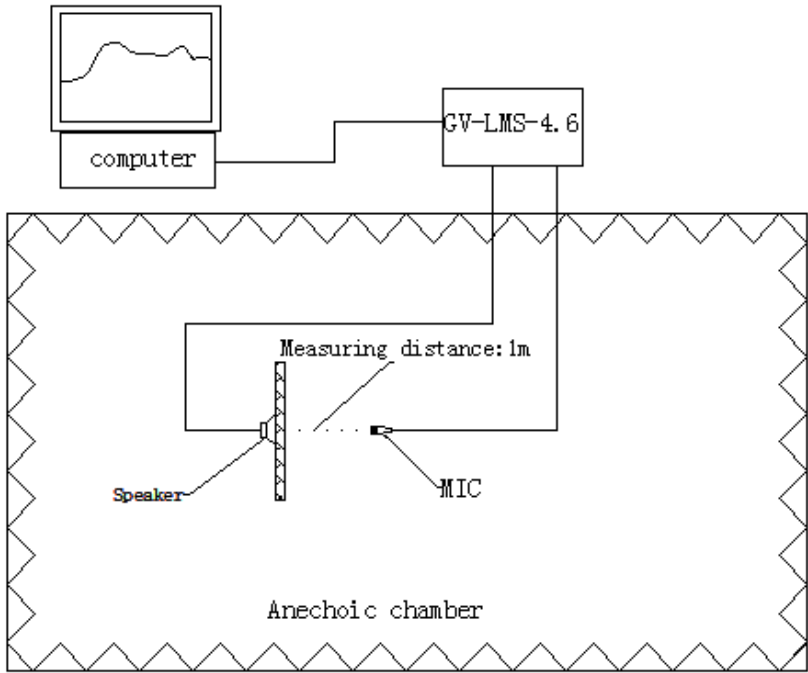

FREQUENCY CURVE

频响曲线图标

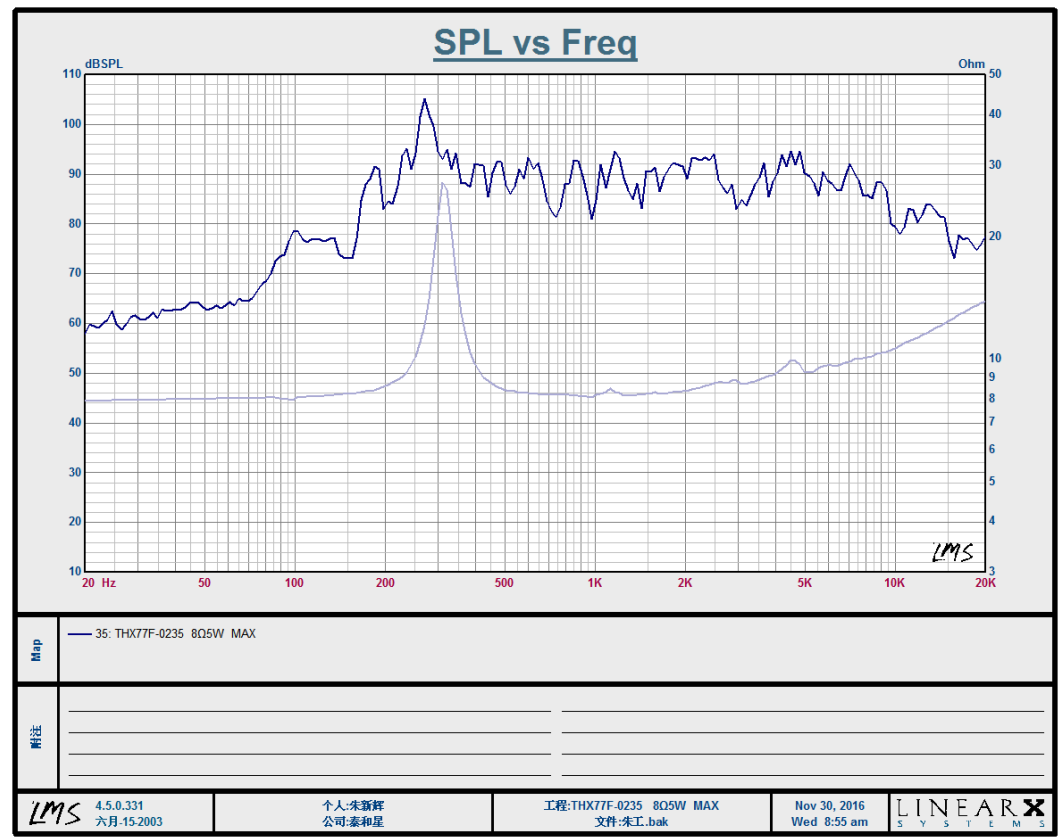

机种编号 (MODEL NO.): PMB77F-0235 8Ω5W	图面名称 (DRAWING NAME): 性能曲线图	备注 (REMARK):
设计 (DESIGN):	审核 (AUDITING):	审核 (AUDITING):