


FT-32T-3.2A3

Maximum input voltage	30 Vp-p
Resonant frequency	3.2± 0.5 KHz see Measurement Methods
Resonant impedance	200 Ω max. see Measurement Methods
Electrostatic capacitance	140,000 ±30% pF at 120 Hz / 1 V
Operating temperature	-20 ~ +70° C
Storage temperature	-30 ~ +80° C
Dimensions	Ø32.0x H0.60 mm
Material	Brass
DC resistance 20 M & min. Fluke 45 rate:	Fast
Measurement time:	1 second(only for δ 20 mm test)
RoHS	yes

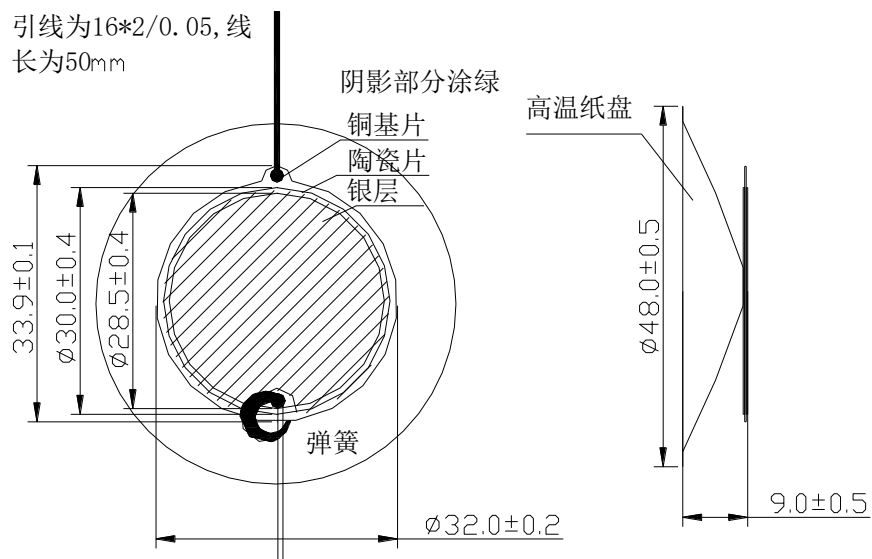

피엠비일렉텍: 서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbec.co.kr