




PMB14PCB

1	Resonant Frequency	4000±400Hz
2	Operating Voltage	1 ~ 25Vp-p
3	Rated Current	Max.3mA , At 4KHz 50% duty Square Wave 5Vp-p
4	Sound Output at 10cm	Min. 80dB, At 4KHz 50% duty Square Wave 5Vp-p
5	Capacitance	12000±30% pF At 120Hz
6	Operating Temperature	-20°C ~ +70°C
7	Store Temperature	-30°C ~ +80°C
8	Net Weight	Approx 1.0g
9	RoHS	Yes

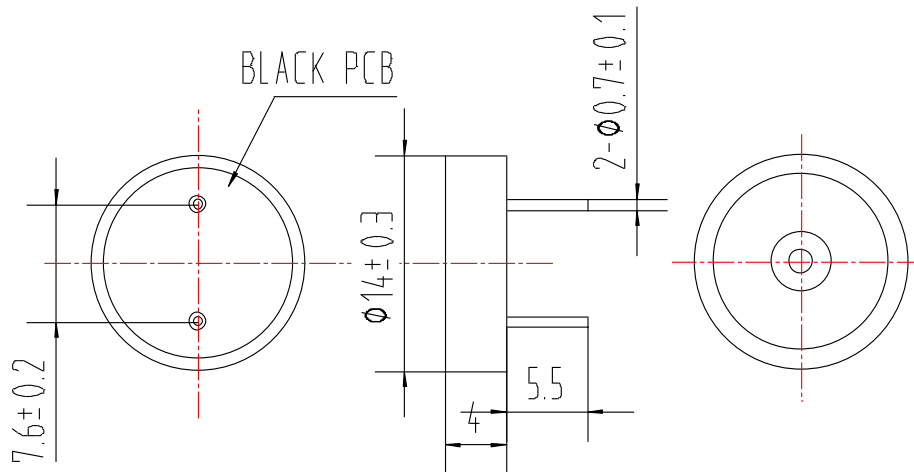

*Unit: mm; Tolerance: ± 0.5mm Except Specified

*Housing Material: Black PPO

피엠비일렉텍: 서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbe.co.kr