


## PMB19A


| TYPE                           | PMB19A                            |
|--------------------------------|-----------------------------------|
| ◆Min. Sound Pressure Level(dB) | 85/4.0KHz;10Vp-p;square wave/10cm |
| Rated Voltage(Vp-p)            | 10Vp-p                            |
| Max Input Voltage(Vp-p)        | 30Vp-p                            |
| ◆Resonant frequency (KHz)      | 4.0±0.5                           |
| Capacitance at 120Hz (pF)      | 14000±30%                         |
| ◆Max. Current Consumption      | 3mA                               |
| Operating Temperature(°C)      | -20 ~ +60                         |
| Storage Temperature(°C)        | -30 ~ +70                         |
| Weight(g)                      | 2                                 |

◆ Value applying at rated voltage

DIMENSIONS :  
(Unit: mm)

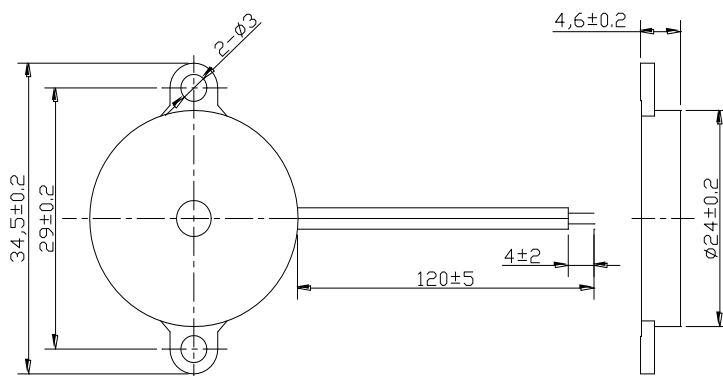

FREQUENCY RESPONSE :

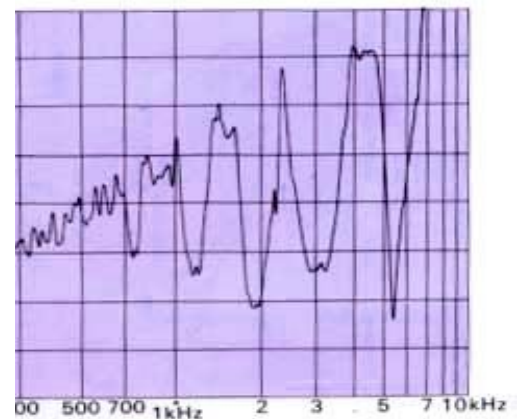

M-29 10V<sub>P-P</sub> Square Wave/10cm

피엠비일렉텍: 서울시 구로구 경인로53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbeco.kr