
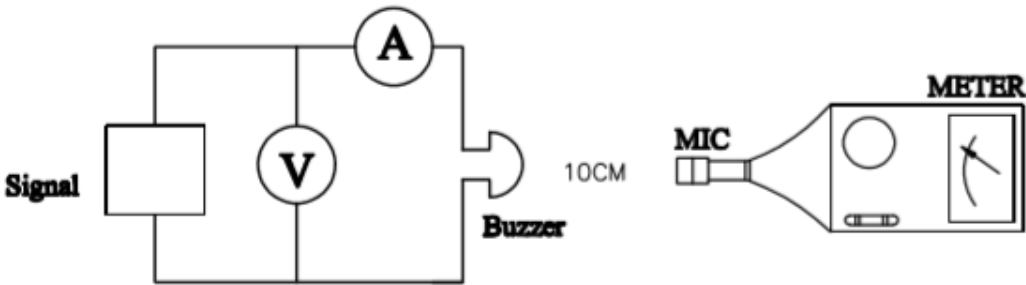


SKD-72

电声性能 Electricity capability		
1	额定电压 Rated Voltage (V DC)	12V
2	工作电压 Operating Voltage (V DC)	6-12V
3	工作电流 Rated Current (mA)	≤80
4	谐振频率 Resonant Frequency (KHZ)	2.3±0.5
5	声响分贝 Sound Output at 10cm (dB)	118
6	声音 voice	报警声
7	塑壳材料/颜色 Shell Material/Color	ABS/黑色
8	工作温度 Operating Temperature (℃)	-20 ~ +70℃
9	贮存温度 Store Temperature (℃)	-30 ~ +80℃
10	重量 Weight (g)	25
测试方法 TEST METHOD		
		

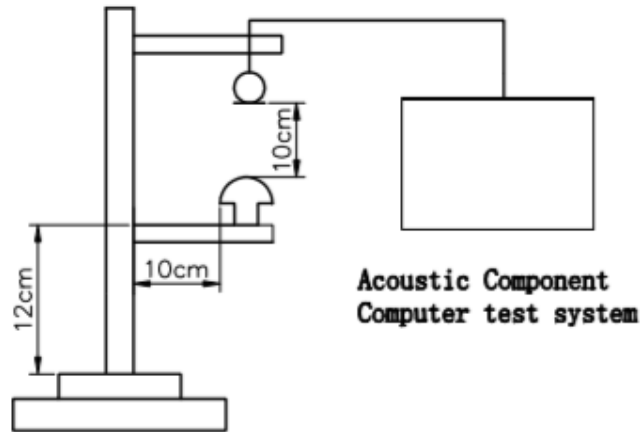

环境试验 Environmental Test

1. 高温试验 High temperature test

先在 $80\pm 2^{\circ}\text{C}$ 中工作4小时, 再放置2小时, 然后在正常大气压下恢复2小时后检查。

First work with the temperature of $80\pm 2^{\circ}\text{C}$ for 4 hours, then be placed for 2 hours, then renew for 2 hours at normal air pressure, then inspect.

2. 低温试验 Low temperature test

先在 $-30\pm 2^{\circ}\text{C}$ 中工作2小时, 再放置4小时, 然后在正常大气压下恢复2小时后检查。

First work with the temperature of $-30\pm 2^{\circ}\text{C}$ for 2 hours, then placed for 4 hours, then renew for 2 hours at normal air pressure to inspect.

3. 碰撞试验 Impact test

受 $100\pm 10\text{m/s}^2$, 脉冲持续时间16 ms, 脉冲重复频率1-3次/s, 1000 ± 10 次的碰撞试验后检查。

$100\pm 10\text{m/s}^2$, Pulse duration 16 ms, Pulse rate 1-3times/s, After 1000 ± 10 impact test inspects

4. 跌落试验 Drops test

按包装箱在任一角及角相连的3条棱和角相连的3个面从800mm处跌落7次后检查。

According to packing case in no matter what corner and angle connected 3 arris and the angle connected 3 surface drops 7 times from 800mm place to inspect

피엠비일렉텍: 서울시 구로구 경인로 53가길 10 대명벨리온 904호

Tel: 02-2619-0388(대) Fax: 02-2619-0346

E-mail: pmbe@pmbe.co.kr Web site: www.pmbeco.kr